



ZEBRA

Z-Endure™4000T


FEATURES

- Thermal transfer, acrylic label with a permanent acrylic adhesive
- Excellent smear/scratch resistance
- Excellent durability and chemical resistance
- Special acrylic film offers 10 year outdoor durability
- Available in white (05827RM)

MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White coated acrylic film	2.0 mil
Adhesive	Permanent, acrylic-based	0.8 mil
Liner	50 lb. semi-bleached, kraft stock	3.2 mil
TOTAL ± 10%		6.0 mil

ADHESIVE STRENGTH

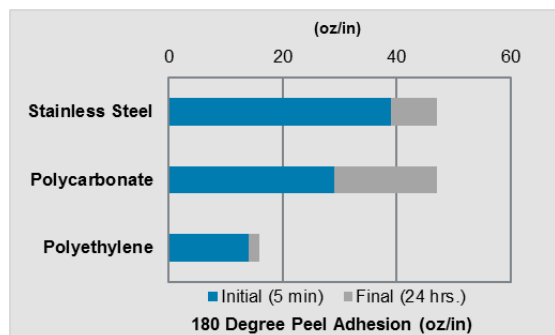

TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
50° F (10° C)	-40° F to 212° F (-40° C to 100° C)	72° F (22° C) at 50% RH

Expected Exterior Life

10 years

CHEMICAL RESISTANCE

		Suggested Ribbon		
		6200	5095	5100
Weak	Blood	●	●	●
	Body Fluid	●	●	●
	Salt Water	●	●	●
	Water	●	●	●
	Window Cleaner	●	●	●
Moderate	Alcohol	●	●	●
	Ammonia	●	●	●
	Bleach	●	●	●
	IPA	●	●	●
Harsh	Gasoline	●	●	●
	Grease	●	●	●
	Oil	●	●	●
Extreme	Acetone	NR	NR	NR
	IR Reflow	NR	NR	NR
	MEK	NR	NR	NR
	TCE	NR	NR	NR
	Xylene	NR	NR	NR

● Recommended ● Test in Your Application NR Not Recommended

SUGGESTED APPLICATIONS

- Outdoor tools/equipment



All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

NA and Corporate Headquarters | +1 800 423 0442 | inquiry4@zebra.com

©2018 ZIH Corp and/or its affiliates. All rights reserved. ZEBRA and the stylized Zebra head are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners.



Z-Endure™4000T

QUV Weathering Machine Testing

Samples were printed with Zebra 5095 and 5100 ribbons and applied to aluminum panels at room temperature. Samples were subjected to QUV Weathering Machine Cycles which alternate between 8 hours UV at 60°C, 4 hours condensation at 50°C. After simulating 10 years* of outdoor exposure, the following results were noted.

Adhesive Durability	Facestock Appearance	Print Quality	Facestock Degradation (Chalking, cracking, shrinkage, etc.)
No Change	No Change	No Change	None observed at 5,000 hours. Very slight chalking at 10,000 hours.

*One year of Southern Florida exposure is approximated by 1000 hours in the QUV with above cycles.

All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.
NA and Corporate Headquarters | +1 800 423 0442 | inquiry4@zebra.com
©2018 ZIH Corp and/or its affiliates. All rights reserved. ZEBRA and the stylized Zebra head are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners.