



ZEBRA

PolyPro 3000T Matte


FEATURES

- Thermal transfer, matte polypropylene label with a permanent acrylic adhesive
- Good smear/scratch resistance
- Excellent conformability to tight diameters
- Meets FDA 175.105 for indirect food contact requirements
- Available in white (65330RM)

MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White matte topcoated polypropylene	3.0 mil
Adhesive	Permanent, acrylic-based	1.0 mil
Liner	50 lb. semi-bleached, kraft stock	3.0 mil
TOTAL ± 10%		7.0 mil

ADHESIVE STRENGTH

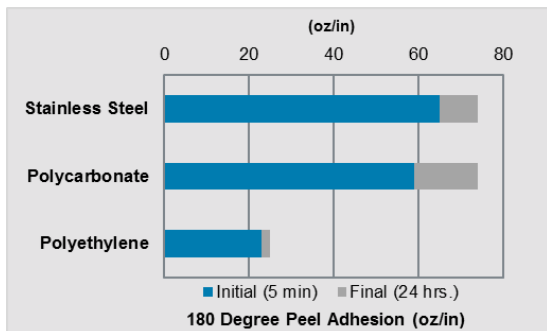

TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
45°F (7°C)	-65°F to 200°F (-54°C to 80°C)	72° F (22° C) at 50% RH

Expected Exterior Life

6 months

CHEMICAL RESISTANCE

Chemical	Suggested Ribbon			
	6100	3200	6200	
Weak	Blood	●	●	●
	Body Fluid	●	●	●
	Salt Water	●	●	●
	Water	●	●	●
	Window Cleaner	●	●	●
Moderate	Alcohol	●	●	●
	Ammonia	●	●	●
	Bleach	●	●	●
	IPA	●	●	●
Harsh	Gasoline	●	●	●
	Grease	●	●	●
	Oil	●	●	●
Extreme	Acetone	●	●	●
	IR Reflow	●	●	●
	MEK	●	●	●
	TCE	●	●	●
	Xylene	●	●	●

● Recommended ● Test in Your Application NR Not Recommended

SUGGESTED APPLICATIONS

- Package Labeling including corrugate, plastic, and metal



- Test tube labeling



- Indirect food labeling



For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

NA and Corporate Headquarters | +1 800 423 0442 | inquiry4@zebra.com

©2016 ZIH Corp and/or its affiliates. All rights reserved. ZEBRA and the stylized Zebra head are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. 09/2016